

1. Product Overview

The Nokia ONT G-1426G-F is the solution for home networking that is delivered by Gigabit Passive Optical Network (GPON). The device has built-in concurrent dual-band Wi-Fi® 802.11 b/g/n/ax and 802.11ac/ax networking with triple play capabilities that include voice, video and data. The Nokia ONT G-1426G-F helps to enhance the end-user's experience with the help of the service provider's Wi-Fi management capabilities in the cloud and intuitive home user support using the Nokia WiFi Mobile App.

Nokia ONT G-1426G-F provides an end-to-end Wi-Fi network view and allows management of groups of Wi-Fi networks.



Figure 1: Nokia ONT G-1426G-F front view



Figure 2: Nokia ONT G-1426G-F back view

© 2025 Nokia. Nokia Confidential Information. Use subject to agreed restrictions on disclosure and use.

If you have received this document in error, do not use or copy this document for any purpose nor disclose its contents to any other person.

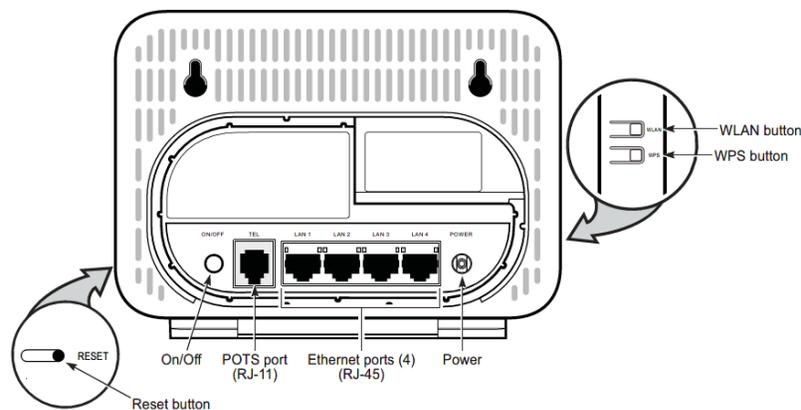


Figure 3: Nokia ONT G-1426G-F back and side view

A. Technical Specifications

Height: 134 mm (5.3 in)
Width: 31.5 mm (1.2 in)
Length: 176 mm (6.9 in)
Weight: 0.276 kg (0.61 lb)

Desktop or wall-mount using an external bracket.

Power consumption:

- Standby mode: 7.4 W
- Typical mode: 8.6 W

B. Manufacturer Information

For Products Purchased in EU/EAA Countries

The products are manufactured and imported by Nokia Solutions and Networks Oy, Karakaari 7, 02160 Espoo, Finland.

Nokia is a registered trademark of Nokia Corporation.

For Products Purchased in the United States

The products are imported by Nokia of America Corporation.

- Offices: <https://www.nokia.com/contact-us/worldwide-offices/north-america>
- Support: <https://www.nokia.com/support/>
- Other contacts: <https://www.nokia.com/contact-us/>

Please contact your Internet Services Provider in case of questions on the product.

2. Safety Guidelines

ALWAYS READ THE PRODUCT GUIDE BEFORE SET UP OR USE OF THE PRODUCT. IT IS YOUR RESPONSIBILITY TO FAMILIARIZE YOURSELF WITH THE PRODUCT GUIDE AND WARNINGS, AND TO USE A PRODUCT PROPERLY. CONTACT YOUR INTERNET SERVICES PROVIDER FOR FURTHER QUESTIONS.

Warning - Risk of electric shock or fire

Connect the Product power adaptor or cord to the right supply voltage (for example, 230V in Europe, Australia, South Africa and 120V in US).

The socket-outlet shall be easily accessible.

Pay attention to the power load of the electrical outlet and possible extension cord. An overburdened power outlet or damaged cords and plugs may cause electric shock or fire. Check the power cords regularly. If you find any damage, replace the cord immediately.

© 2025 Nokia. Nokia Confidential Information. Use subject to agreed restrictions on disclosure and use.

If you have received this document in error, do not use or copy this document for any purpose nor disclose its contents to any other person.

Nokia ONT G-1426G-F Quick Reference Guide

Do not connect the plug into an extension cord, receptacle, or other outlet unless the plug can be fully inserted with no part of the blades exposed.

Leave adequate space for heat dissipation to avoid any damage caused by overheating the Product. Do not cover the Product or its ventilation holes. Blocking the ventilation holes may cause fire.

Use the power adapter provided with your Product and do not fasten the power cable to building surfaces. Ensure the cable can move freely. Do not place heavy objects on the cable.

Do not use the Product outside, and make sure all the connections are indoors.

Do not install, use, or service this Product during a thunderstorm. There is a remote risk of electric shock from lightning.

Caution - Potential equipment damage

Follow these recommendations to protect yourself and the Product from harm:

- Do not look directly at the optical port without protection.
- Do not insert any sharp object into the openings of a Product.
- Do not put the Product near a heat source. Avoid placing the Product in direct sunlight.
- Do not put the Product in damp or wet locations; for example, near a bathtub, washbowl, kitchen sink or laundry tub, in a wet basement, or near a swimming pool. Do not spill any liquid on the Product.
- Do not touch the Product or its power adapter or cord with wet hands.
- Do not place the Product on an unstable surface or support.
- Do not place heavy objects on top of the Products.
- Do not use liquid or aerosol cleaners; unplug the Product and use a soft, dry cloth for cleaning.
- When connecting a PC or other electronic device to a Product, make sure you use the right cables and connect the device to the right port of the Product. Incorrect connections may damage the device and/or the Product.
- Do not open or try to open the Product. Opening or removing covers can expose you to dangerous high voltage points or other risks.

It is recommended that users and other individuals maintain a distance of at least 10 cm between themselves and the Product to avoid exposure. The Product contains components that emit an electromagnetic field and could interfere with pacemakers or other electronic medical devices. If you have a pacemaker or other implantable or personal medical device, please consult your physician or manufacturer about the required minimum safe distance between the Product and your medical device.

Keep your product and accessories out of reach of pets. They could damage it and cause injury or electrocution.

If the Product malfunctions or fails to perform as expected, stop using it immediately.

The product is expected to operate at a temperature of 0 to 40 degrees Celsius for a relative humidity between 10% and 90%.

3. Install the ONT

The ONT is normally installed by a professional installer.

1. Plug the power cable to the ONT into power input jack.
2. Plug the power socket to the wall socket.
3. Remove the protective cap on the optical port of the ONT.
4. Remove the protective cap from the optical fiber.
5. Plug the optical fiber to the optical port of the ONT.
6. Push the power button to be "ON". ("ON" = recessed stated, "OFF" = non-recessed state)

4. LED description

The following table describes the LEDs of the device:

LED indicator	LED color and behavior	LED behavior description
POWER	Green solid	Power on
POWER	Fast Green flashing (0.25s on, 0.25s off)	Software update in progress.

© 2025 Nokia. Nokia Confidential Information. Use subject to agreed restrictions on disclosure and use.

If you have received this document in error, do not use or copy this document for any purpose nor disclose its contents to any other person.

Nokia ONT G-1426G-F Quick Reference Guide

LED indicator	LED color and behavior	LED behavior description
POWER	Slow Green flashing (1s on, 1s off)	Failure at startup or loopback detected.
POWER	Off	Power off
LINK	Green solid	ONT is configured on the OLT and is in service (UP) mode.
LINK	Fast Green flashing	ONT is attempting to range with OLT. Or ONT is awaiting or receiving OMCI data.
LINK	Slow Green flashing	GPON link is down or no link is connected
LINK	Off	PON link is not initialized or in O7 status
LAN 1 to 4	Green solid	ONT is connected to the associated LAN port (includes devices with wake-on-LAN capability where a slight voltage is supplied to an Ethernet connection).
LAN 1 to 4	Green flashing	LAN activity is present (traffic in either direction).
LAN 1 to 4	Off	ONT power is off, or Ethernet is not connected.
TEL	Green Solid	Phone is off hook and VOIP service is building up.
TEL	Fast Green flashing	Phone is in "call in" or "talking" condition.
TEL	Slow flashing Green	VOIP service is out of service.
TEL	Off	All phones are on hook and VOI services not built up.
WPS	Green Solid	Wi-Fi protected setup link is up (negotiation and auto-configuration successful).
WPS	Slow Green flashing	Wi-Fi protected setup link activity (negotiation and auto-configuration ongoing).
WPS	Fast green flashing	WPS session overlap detected.
WPS	Off	Wi-Fi protected setup link down or no link connected (negotiation has not started or has failed). Wi-Fi protected setup processing exception or multiple peers using WPS simultaneously.
2.4 GHz	Green Solid	WLAN link is enabled in 2.4 GHz.
2.4 GHz	Green flashing	Traffic is passing through the WLAN link.
2.4 GHz	Off	WLAN link is disabled, or no link is connected.
5GHz	Green Solid	WLAN link is enabled in 5 GHz.
5GHz	Green flashing	Traffic is passing through the WLAN link.

© 2025 Nokia. Nokia Confidential Information. Use subject to agreed restrictions on disclosure and use.

If you have received this document in error, do not use or copy this document for any purpose nor disclose its contents to any other person.

LED indicator	LED color and behavior	LED behavior description
5GHz	Off	WLAN link is disabled, or no link is connected.
INTERNET	Green solid	IP connected (the device has a WAN IP address from IPCP/DHCP/Static and Broadband link is up) and no traffic detected. If the IP or PPPoE session is dropped due to an idle time out, the light remains green if PON link is still present. If the session is dropped for any other reason, the light is turned off.
INTERNET	Green flashing	PPPoE or DHCP connection is in progress.
INTERNET	Off	Broadband physical connection power off, device in bridged mode with no IP address assigned to the device, or Broadband physical interface connection not present.
USB	Green Solid	A device is connected to the USB port.
USB	Green flashing	Traffic is passing through the USB connection.
USB	Off	No device is connected to the USB port.
USB	Disabled	Note: Not all variants of G-1426G-F support USB. The last LED is reserved for USB.

5. Connecting devices

The ONT supports the following connections:

- Ethernet
- WiFi
- Telephone

Connecting Ethernet

The product has four 1G Ethernet ports (RJ-45 connectors) as visible in *Figure 2: Nokia ONT G-1426G-F back view*. You can make Ethernet connections to the product by connecting the Ethernet cable(s) to the appropriate Ethernet port(s) of the product.

Connecting WiFi

The product supports connection of WiFi devices by using the SSID and WiFi key or by using WPS.

Using the SSID and WiFi key:

You can connect devices that are going to use WiFi by using the SSID and WiFi key shown on the label on the back of the product.

Using WPS:

If you are connecting WiFi devices that support WPS, press the WPS button as visible in *Figure 2: Nokia ONT G-1426G-F back view* on the back of the product to start the WiFi protected setup process.

Connecting Telephone

You can connect a landline device that has a cable with an RJ-11 connector to the Telephone port on the back of the product as visible in *Figure 2: Nokia ONT G-1426G-F back view*.

6. Accessing the webGUI

The product supports a WebGUI, which can be used for configuration, maintenance, and troubleshooting. You can collect device status through the WebGUI for information on network connectivity. You can configure the product using the WebGUI available on a device such as PC, tablet, or laptop. The device must have an Ethernet LAN connection or a WiFi connection with the product. The WebGUI also displays useful information about the product.

To access WebGUI, you need to do the following:

- Establish a connection between your device (such as PC, tablet, or laptop) from which you will access the WebGUI on the product.
- Log into WebGUI when needed to view and configure parameters; you will need to enter the username and password that are provided on the product label on the back of product to log into WebGUI.

Establishing a connection and logging in to the webGUI

1. Ensure the Local Area Connection setting on your device is configured as “obtain an IP address automatically”.

Note: The device must be powered up.

Do one of the following as described in Connecting devices:

- a. Connect your device to the product through one of the Ethernet ports
- b. Establish a WiFi connection between your device and the product

On your device, open a web browser, and enter the IP address that is provided on the product label at the back of the product, for example: <http://192.168.1.254> (default) or <https://192.168.1.254>

Once the connection is established between your device and the product, the left side of your device’s screen provides the WebGUI main menu, and the right side provides overview information.


To log in, click Sign in or click on any of the menu items on the left side of the screen. The log in window appears and you are prompted to log in. Type the username and password in the respective fields and then click Login. The username and password are provided on the product label on the back of the product.

Note: After predefined consecutive unsuccessful login attempts, you will be locked out for a specific amount of time.

You should now see the Overview screen which provides information about the product.

To improve security, it is recommended that you change the default password. You can do this by going to the Maintenance/Change screen

7. WebGUI Overview screen

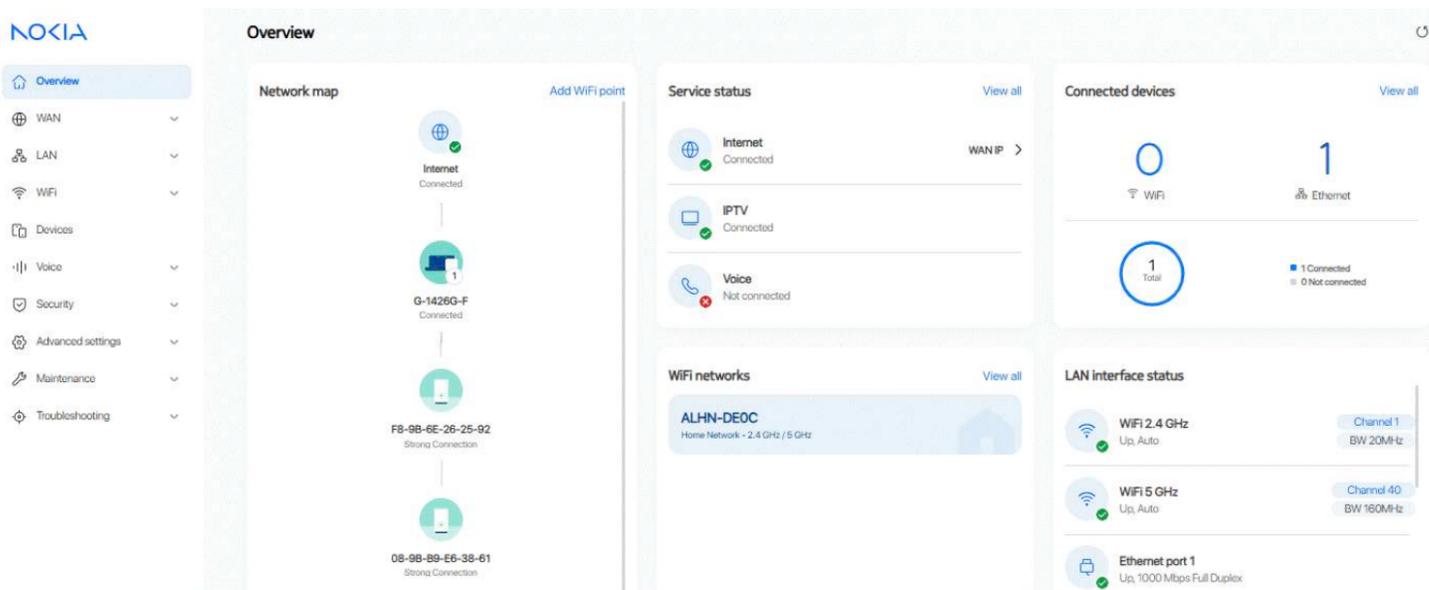

Network map

© 2025 Nokia. Nokia Confidential Information. Use subject to agreed restrictions on disclosure and use.

If you have received this document in error, do not use or copy this document for any purpose nor disclose its contents to any other person.

Displays information about the status of the network and connection to the internet. The status of the internet connection is defined by the presence of an IP address on the internet service. Up is indicated with green and Down is indicated with red.

Service status

Displays the active status of the configured services.

- Internet: shows the status of the internet service (online/offline)
- IPTV: Shows the status of the IPTV service if configured by the service provider (online/offline)
- Voice: service state is defined by the registration status of the voice service (online/offline)

WiFi networks

Displays the active WiFi networks, regardless of whether a device is wirelessly connected to the product. You may view WiFi connectivity information such as the network connection name. Click on the WiFi network to change its configuration. Click View all to view the available WiFi networks.

Connected clients

The connected devices field of the Overview screen shows the following:

- WiFi: the number of devices connected to the WiFi network
- Ethernet: the number of devices connected via Ethernet
- Total: provides an overview of the total number of connected devices

Click View all to view available clients.

LAN interface status

The LAN interface status field of the Overview screen shows the following:

- WiFi 2.4 GHz: Indicates whether 2.4 GHz band is enabled or disabled and displays broadcast Channel and Channel bandwidth. (Auto represents that an available channel is automatically selected)
- WiFi 5 GHz: indicates whether 5 GHz band is enabled or disabled and displays broadcast Channel and Channel bandwidth. (Auto represents that an available channel is automatically selected)
- Ethernet port: indicates whether a device is connected through an Ethernet connection, along with the transfer speed and duplex mode

8. FCC Declaration of Conformity

 This device complies with part 15 of the U.S. FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) these devices must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

No Unauthorized Modifications:

Do not make any changes or modifications to the Product without the prior express written approval of Nokia. Any changes or modifications made without express written approval could void the user's authority to operate the device.

© 2025 Nokia Solutions and Networks Oy

Nokia is a registered trademark of Nokia Corporation

© 2025 Nokia. Nokia Confidential Information. Use subject to agreed restrictions on disclosure and use.

If you have received this document in error, do not use or copy this document for any purpose nor disclose its contents to any other person.