

Nokia 7220 IXR-H series Interconnect Routers

Release 25

The Nokia 7220 IXR-H series platforms are designed for the leaf and spine layers of data center fabrics, delivering very high-scale interconnectivity for enterprise, service provider and webscale data center and cloud environments.

Overview


Network operators require highly scalable, modular, reliable platforms that are designed to support high-speed interfaces for current and future network buildouts, including support for AI and high-performance computing (HPC) workloads.

With unmatched efficiency and scalability, the 7220 IXR-H series facilitates the creation of high-throughput, low-latency hyperscale networks. They offer 800GE, 400GE, 200GE, 100GE, 50GE, 40GE and 10GE interfaces for intra-fabric and workload connectivity.

The 7220 IXR-H series is ideally suited for spine deployments in data center CLOS architectures.

The 7220 IXR-H series empowers data center networking teams to build high-capacity, lossless, low-latency infrastructure for Artificial Intelligence and Machine Learning clusters and workloads.

The 7220 IXR-H series is available in seven variants based on interfaces and system throughput.

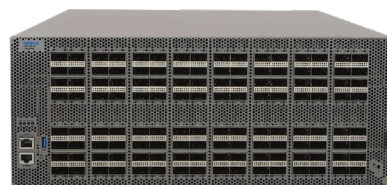

7220 IXR-H2



7220 IXR-H3



7220 IXR-H4-32D



7220 IXR-H4



7220 IXR-H5-32D



7220 IXR-H5-64D



7220 IXR-H5-64O

7220 IXR-H2

The 7220 IXR-H2 is 4 RU high with a system capacity of 12.8 Tb/s full duplex (FD). It is equipped with 128 100GE QSFP28 ports.

All QSFP28 ports include hardware support for native 100GE speeds.

These port options allow for high-performance intra-fabric uplinks, storage and server connectivity.

The 7220 IXR-H2 supports four power supplies with 2+2 redundancy using either AC or DC power options.

The system supports both front-to-back and back-to-front airflow configuration with eight N+1 hot-swappable fans.

7220 IXR-H3

The 7220 IXR-H3 is 1 RU high with a system capacity of 12.8 Tb/s FD. It is equipped with 32 400GE QSFP-DD and two 1/10GE SFP+ ports.

All QSFP-DD ports include hardware support for native 400GE, 200GE, 100GE, 50GE and 40GE.

The SFP+ ports include hardware support for native 10GE speeds.

These port options provide exceptional flexibility in a variety of leaf or spine deployment configurations.

The 7220 IXR-H3 supports two power supplies with 1+1 redundancy using either AC or DC power options.

The system supports both front-to-back and back-to-front airflow configuration with six N+1 hot-swappable fans.

7220 IXR-H4-32D

The 7220 IXR-H4-32D is 1 RU high with a system capacity of 12.8 Tb/s FD. It is equipped with 32 400GE QSFP-DD ports and one 1/10GE SFP+ port.

All QSFP-DD ports include hardware support for native 400GE, 200GE, 100GE, 50GE and 40GE. The SFP+ ports include hardware support for native 10GE speeds.

These port options allow for high-performance intra-fabric uplinks, storage and server connectivity.

The 7220 IXR-H4-32D supports two power supplies with 1+1 redundancy using either AC or DC power options. The system supports front-to-back airflow configuration with seven N+1 hot swappable fans.

7220 IXR-H4

The 7220 IXR-H4 is 2 RU high with a system capacity of 25.6 Tb/s FD. It is equipped with 64 400GE QSFP-DD ports and two 1/10GE SFP+ ports.

All QSFP-DD ports include hardware support for native 400GE, 200GE, 100GE, 50GE and 40GE. The SFP+ ports include hardware support for native 10GE speeds.

These port options allow for high-performance intra-fabric uplinks, storage and server connectivity.

The 7220 IXR-H4 supports two power supplies with 1+1 redundancy using either AC or DC power options. The system supports front-to-back airflow configuration with four N+1 hot swappable fans.

7220 IXR-H5-32D

The 7220 IXR-H5-32D is 1 RU high with a system capacity of 25.6 Tb/s FD. It is equipped with 32 800GE QSFP-DD ports and two 10GE SFP+ ports.

All QSFP-DD ports include hardware support for native 800GE, 400GE, 200GE, and 50GE.

The SFP+ ports include hardware support for native 10GE speeds.

These port options allow for high-performance intra-fabric uplinks, storage and server connectivity.

The 7220 IXR-H5-32D supports two power supplies with 1+1 redundancy using either AC or DC power options. The system supports front-to-back or back-to-front airflow configuration with seven N+1 hot swappable fans.

The 7220 IXR-H5-32D supports Linear pluggable optics (LPO) which enable lower power consumption compared to traditional optical modules. This is critical for AI and HPC use cases where low power consumption is critical.

7220 IXR-H5-64D and 7220 IXR-H5-64O

The 7220 IXR-H5-64D / 7220 IXR-H5-64O is 2 RU high with a system capacity of 51.2 Tb/s FD. It is equipped with 64 800GE QSFP-DD or OSFP112 ports and two 10GE SFP+ ports.



All ports include hardware support for native 800GE, 400GE, 200GE, and 50GE.

The SFP+ ports include hardware support for native 10GE speeds.

These port options allow for high-performance intra-fabric uplinks, storage and server connectivity.

The 7220 IXR-H5-64D/ 7220 IXR-H5-64O supports two power supplies with 1+1 redundancy using either AC or DC power options. The system supports front-to-back or back-to-front airflow configuration with fourN+1 hot swappable fans.

The 7220 IXR-H5-64D/ 7220 IXR-H5-64O supports Linear pluggable optics (LPO) which enable lower power consumption compared to traditional optical modules. This is critical for AI and HPC use cases where low power consumption is critical.

Nokia Service Router Linux

Nokia SR Linux is a Linux®-based open, extensible and resilient NOS that enables scalability, flexibility and efficiency in data center and cloud environments. The Nokia 7220 IXR-H series implements Nokia SR Linux.

SR Linux is a key component of the Nokia Data Center Fabric solution, which also includes the Nokia Event-Driven Automation (EDA) and the Nokia Data Center platforms.

Ground-up, model-driven architecture delivers extensibility

In cloud-scale data center networks, the primary challenges are scalability and ease of operations. SR Linux is designed from the ground up with a management architecture that meets the demands of a model-driven world where visibility—and the scalability and granularity of that visibility—are paramount.

SR Linux features a completely model-driven architecture for flexible and simplified management and operations. SR Linux delivers an extensible and open infrastructure that allows applications to define and declare their own schemas, enabling the retrieval of fine-grained system state and setting of configuration.

Modular, state-sharing architecture

SR Linux uses an unmodified Linux kernel as the foundation on which applications share state via a publish/subscribe (pub/sub) architecture. The Nokia pub/sub architecture is implemented using generalized Remote Procedure Call (gRPC), protocol buffers (protobufs) and the Nokia Impart Database (IDB).

The Nokia IDB is a lightweight database that is optimized to handle high volumes of messages while protecting against any one application slowing down the whole system.

Field-proven protocol stacks

SR Linux leverages field-proven protocol stacks from the Nokia Service Router Operating System (SR OS), which has a strong pedigree in IP routing.

Enterprise, service provider and webscale data centers are increasingly adopting leaf-spine fabric designs using enhanced IP routing with Multiprotocol-Border Gateway Protocol (MP-BGP), EVPN, Virtual Extensible LAN (VXLAN), MPLS and segment routing protocols. By using field-proven protocol stacks, data center planning and operations teams can immediately benefit from the stability, scalability and interoperability of a resilient NOS.

Superior CLI programmability and integration of third-party applications

Operations teams can leverage command line interface (CLI) plugins to completely customize the way the CLI operates, plugging in Linux commands or pulling the state/configuration from various locations.

SR Linux allows third-party applications to be fully integrated into the system and given all the same benefits as Nokia applications. This includes consistent configuration via YANG, telemetry support, life-cycle management and visibility of system resources.

SR Linux offers a state-of-the-art NetOps Development Kit (NDK) for data center teams to develop new applications and operational tools in the language of their choice with deep programmatic access to, and control of, the entire system.



Nokia Event-Driven Automation

The Nokia Event Driven Automation framework (EDA) is an extensible, declarative, intent-based automation and operations NetOps platform that delivers agile and scalable network operations for data center and cloud environments of any size.

The declarative, intent-based framework and the automation capabilities of the EDA framework are only made possible by leveraging a modern NOS that offers an open, model-driven, stream-anything foundation.

By using Nokia SR Linux modern streaming telemetry approach for the NOS, the EDA framework has timely and efficient access to more granular data across the entire fabric. This data can then be used to understand the state of the network, which is essential for event-driven applications to determine if the network is behaving according to their intent. This approach is also highly scalable, which is essential in today's networks.

Technical specifications

Table 1. 7220 IXR-H series specifications (part 1)

Feature	7220 IXR-H2	7220 IXR-H3	7220 IXR-H4-32D	7220 IXR-H4
System throughput: Full duplex (FD)	12.8 Tb/s	12.8 Tb/s	12.8 Tb/s	25.6 Tb/s
Ports	128 x QSFP28	32 x QSFP-DD 2 x SFP+	32 x QSFP-DD 1 x SFP+	64 x QSFP-DD 2 x SFP+
Hardware support (maximum ports per chassis)				
400GE	NA	32	32	64
200GE	NA	64	64	128
100GE	128	128	128	256
50GE*	128	128	128	256
40GE	128*	32	32	64
25GE	128*	128	128*	128*
10GE	128*	128	128*	256*
Management ports	1 x 1000BASE-T	1 x 1000BASE-T	1 x 1000BASE-T	1 x 1000BASE-T
USB ports	1 x USB2.0	1 x USB2.0	1 x USB2.0	1 x USB2.0
Console port	1 x RJ45	1 x RJ45	1 x RJ45	1 x RJ45
Processor	4-core x86	4-core x86	8-core x86	8-core x86
Memory	32G DDR4	32G DDR4	32G DDR4	32G DDR4
Memory buffer size	64 MB	64 MB	113.5 MB	113.5 MB
SSD	32G MLC	32G MLC	32G MLC	128G MLC
Power	2+2 redundant AC: 100V to 240V DC: -48V / -60V 1300 W AC 1300 W DC	1+1 redundant AC: 100V to 240V DC: -48V / -60V 1600 W AC 1600 W DC	1+1 redundant AC: 100V to 240V DC: -48V / -60V 1600 W AC 1600 W DC	1+1 redundant AC: 200V to 240V DC: -48V / -60V 2400 W AC 2100 W DC
Hot-swappable power supplies	Yes		Yes	Yes

* Future software support

Feature	7220 IXR-H2	7220 IXR-H3	7220 IXR-H4-32D	7220 IXR-H4
Fan modules	8 Front-to-back or back-to-front airflow	6 Front-to-back or back-to-front airflow	7 Front-to-back or back-to-front airflow	4 Front-to-back airflow
Hot-swappable fan modules	Yes	Yes	Yes	Yes
Dimensions	Height: 17.4 cm (6.85 in); 4 RU Width: 43.85 cm (17.26 in) Depth: 55 cm (21.65 in) Fits in standard 19-in mounting rack	Height: 4.35 cm (1.75 in); 1 RU Width: 43.85 cm (17.26 in) Depth: 55 cm (21.65 in) Fits in standard 19-in mounting rack	Height: 4.35 cm (1.75 in); 1 RU Width: 43.85 cm (17.26 in) Depth: 55 cm (21.65 in) Fits in standard 19-in mounting rack	Height: 8.7 cm (3.43 in); 2 RU Width: 44 cm (17.32 in) Depth: 64.92 cm (25.56 in) Fits in standard 19-in mounting rack
Weight	24.6 kg (54.23 lb) (unpopulated) 29.84 kg (65.78 lb) (fully populated)	8.53 kg (18.80 lb) (unpopulated) 11.18 kg (24.64 lb) (fully populated)	9.3 kg (20.50 lb) (unpopulated) 12.5 kg (27.56 lb) (fully populated)	6.5 kg (36.37 lb) (unpopulated) 21.50 kg (47.39 lb) (fully populated)
Discrete Trusted Platform Module (TPM)	Yes	Yes	Yes	Yes
Normal operating temperature range	0°C to +40°C (32°F to +104°F) sustained	0°C to +40°C (32°F to +104°F) sustained	0°C to +40°C (32°F to +104°F) sustained	0°C to +40°C (32°F to +104°F) sustained
Shipping and storage temperature	-40°C to +70°C (-40°F to +158°F)	-40°C to +70°C (-40°F to +158°F)	-40°C to +70°C (-40°F to +158°F)	-40°C to +70°C (-40°F to +158°F)
Normal humidity	5% to 95%, non-condensing	5% to 95%, non-condensing	5% to 95%, non-condensing	5% to 95%, non-condensing

* Future software support

Table 2. 7220 IXR-H series specifications (part 2)

Feature	7220 IXR-H5-32D	7220 IXR-H5-64D	7220 IXR-H5-64O
System throughput: Full duplex (FD)	25.6 Tb/s	51.2 Tb/s	51.2 Tb/s
Ports	<ul style="list-style-type: none"> • 32 x 800G QSFP-DD • 2 x 10GE SFP+ 	<ul style="list-style-type: none"> • 64 x 800G QSFP-DD • 2 x 10GE SFP+ 	<ul style="list-style-type: none"> • 64 x 800G OSFP • 2 x 10GE SFP+
Hardware support (maximum ports per chassis)			
800GE	32	64	64
400GE	64	128	128
200GE	64	128	128
100GE	128	256	256
50GE	64	128	128
10GE	2	2	2
Management ports	1 x 1000BASE-T	1 x 1000BASE-T	1 x 1000BASE-T
USB ports	1 x USB3.0	1 x USB3.0	1 x USB3.0
Console port	1 x RJ45	1 x RJ45	1 x RJ45



Feature	7220 IXR-H5-32D	7220 IXR-H5-64D	7220 IXR-H5-64O
Processor	8-core x86 with dual boot SPI	8-core x86 with dual boot SPI	8-core x86 with dual boot SPI
Memory	32G DDR5	32G DDR5	32G DDR5
Memory buffer size	165.2 MB	165.2 MB	165.2 MB
SSD	32G iSLC	32G iSLC	32G iSLC
Power	1+1 redundant AC: 200V to 240V DC: -48V / -60V 2400 W AC 2400 W DC	1+1 redundant AC: 200V to 240V DC: -48V / -60V 3000 W AC 3200 W DC	1+1 redundant AC: 200V to 240V DC: -48V / -60V 3000 W AC 3200 W DC
Hot-swappable power supplies	Yes	Yes	Yes
Fan modules	7 Front-to-back	4 Front-to-back	4 Front-to-back
Hot-swappable fan modules	Yes	Yes	Yes
Dimensions	Height: 4.35 cm (1.75 in); 1 RU Width: 43.85 cm (17.26 in) Depth: 65 cm (25.5 in) Fits in standard 19-in mounting rack	Height: 8.7 cm (3.43 in); 2 RU Width: 43.85 cm (17.26 in) Depth: 63 cm (24.8 in) Fits in standard 19-in mounting rack	Height: 8.7 cm (3.43 in); 2 RU Width: 43.85 cm (17.26 in) Depth: 63 cm (24.8 in) Fits in standard 19-in mounting rack
Weight	12.45 kg (27.44 lb) (unpopulated) 16.37 kg (36.09 lb) (fully populated)	18.46 kg (40.7 lb) (unpopulated) 25 kg (55.11 lb) (fully populated)	19.84 kg (43.74 lb) (unpopulated) 25.2 kg (55.55 lb) (fully populated)
Discrete Trusted Platform Module (TPM)	Yes	Yes	Yes
Normal operating temperature range	0°C to +40°C (32°F to +104°F) sustained	0°C to +40°C (32°F to +104°F) sustained	0°C to +40°C (32°F to +104°F) sustained
Shipping and storage temperature	-40°C to +70°C (-40°F to +158°F)	-40°C to +70°C (-40°F to +158°F)	-40°C to +70°C (-40°F to +158°F)
Normal humidity	5% to 95%, non-condensing	5% to 95%, non-condensing	5% to 95%, non-condensing

Software features

The 7220 IXR-H series supports, but is not limited to, the following SR Linux software features.

Open Linux support

- Support for unmodified Linux kernel
- Access to Linux tools, patching and packaging
- SR Linux container
- Linux control groups (cgroupsv2)

Layer 2 features

- Dot1q and untagged sub-interfaces
- Ethernet IEEE 802.1Q (VLAN) with support for jumbo frames
- Link aggregation: Link Aggregation Group (LAG) and Link Aggregation Control Protocol (LACP)
- Link Layer Discovery Protocol (LLDP) on all interfaces
- MAC-VRF network instance with IRB interface¹

Layer 3 features

- IPv4/v6 routing
- BGP with iBGP/eBGP: Support for IPv4/v6, including:
 - Core Prefix independent convergence
 - 4-byte autonomous system number
 - Route reflector
 - Dynamic BGP
 - BGP unnumbered
 - eBGP multi-hop
 - Add-paths for IPv4 and IPv6 routes
- IS-IS v4/v6
- Open Shortest Path First: OSPFv2 and OSPFv3
- Static routes for IPv4/v6
- Equal cost multi-path with consistent and resilient hashing and configurable hash fields
- IPv6 flow label hashing
- VRF: Multiple VRF support

- Maintenance modes
- Bi-directional forwarding detection (BFD), micro BFD (mBFD)
- Interfaces: Loopback interfaces
- Routing policy:
 - Structured rules for accepting, rejecting and modifying routes that are learned and advertised to routing peers.
 - Routes can be matched based on prefix lists, AS path regular expressions, BGP communities, Address Family Indicator/Subsequent Address Family Indicator (AFI/SAFI) protocol, etc.
 - Route leaking between network instances
- Layer 3/Layer 4 access control lists (ACLs) with validation; accept, reject and log actions
- BCM Dynamic Load Balancing hashing option²

QoS

- Intelligent packet classification, including IPv4, IPv6 match-criteria-based classification
- Queuing/scheduling:
 - Strict priority
 - Weighted Round Robin (WRR)
 - Weighted Random Early Detection (WRED)
 - Explicit Congestion Notification (ECN)
- QoS classification and marking based on DiffServ Code Point (DSCP)

System management and automation

- Native model-driven architecture, configuration candidates, exclusive mode, checkpoints, rollbacks
 - Support for SR Linux and OpenConfig³ data models
- Management interfaces: gNMI, gRPC Routing Information Base Interface (gRIBI), JSON-RPC and CLI (transactional, Python CLI and CLI plugins)
- gRPC network operations interface (gNOI)

¹ Supported on 7220 IXR-H5 platforms

² Supported on 7220 IXR-H4, 7220 IXR-H5-64D, and 7220 IXR-H5-64O

³ Future software release

- gRPC Network Security Interface (gNSI)
- Per-user configurable options for CLI
- Local Authentication, Authorization and Accounting (AAA) with Role Based Access Control (RBAC)
- Remote Authentication Dial-In User Service (RADIUS) support for AAA
- Terminal Access Controller Access Control System (TACACS+) AAA via privilege levels
- Password complexity policies and lockout management
- Access to common Linux utilities: Bash, cron, and Python
- Syslog RFC 5424
- Telemetry:
 - Subscription-based telemetry for modeled data structures, either on change or sampled
 - sFlow
 - Logging infrastructure
- Telemetry-driven event management
- Python-based Zero Touch Provisioning (ZTP)
- Address management: Dynamic Host Configuration Protocol (DHCP) v4/v6 relay
- DHCP v4/v6 server with static allocations
- Interactive mirroring
- Unified Forwarding Tables (UFT) profiles

NetOps Development Kit (NDK)

- gRPC and protobuf-based interface for tight integration
- Leverages SR Linux model-driven architecture
- Direct access to other application functionality, e.g., forwarding information base (FIB), Link LLDP and BFD
- Native support for streaming telemetry

Security

- Distributed and aggregated ACLs and policers for control and management plane
- Layer 3, Layer 4 Control Plane Policing (CoPP)
- Mirroring to Switch Port Analyzer1 (SPAN) and Encapsulated Remote SPAN (ERSPAN)
- IPv6 Router Advertisements (RA) guard

Resiliency

- Support for redundant fan and power configurations in data center hardware platforms

System scale and performance

Platform-specific scale and performance information is available and can be provided on request.

Learn more

To learn more about the Nokia Data Center Fabric solution, see the [web page](#).

Standards compliance⁴

Environmental and NEBS

- ETSI EN 300 019-2-1; Storage Tests, Class 1.2
- ETSI EN 300 019-2-2; Transportation Tests, Class 2.3
- ETSI EN 300 019-2-3; Operational Tests, Class 3.2
- GR-3160-CORE

Safety

- AS/NZS 62638-1
- FDA CDRH 21-CFR 1040
- IEC/BS/EN 60825-1
- IEC/BS/EN 60825-2
- IEC/UL/CSA/BS/EN 62368-1

⁴ System design intent is according to the listed standards. Refer to product documentation for detailed compliance status.



Electromagnetic compatibility

- AS/NZS CISPR 32 Class A
- BS EN 55035
- BS EN 61000-3-2
- BS EN 61000-3-3
- BS EN 55032 Class A
- BSMI CNS 15936 Class A
- BT GS-7
- EN 55035
- EN 55032 Class A
- ETSI EN 300 132-1 (AC)
- ETSI EN 300 132-2 (LVDC)
- ETSI EN 300 386
- ETSI ES 201 468
- FCC Part 15 Class A
- ICES-003 Class A
- IEC CISPR 32 Class A
- IEC CISPR 35

- IEC/EN 61000-3-2
- IEC/EN 61000-3-3
- IEC/EN 61000-6-2
- IEC/EN 61000-6-4
- KCC Korea - Immunity KS C 9835
- KCC Korea - Emissions KS C 9832
- VCCI Class A

Directives and regional approvals

- Directive 2011/65/EU RoHS (including Commission Delegated Directive EU 215/863)
- Directive 2012/19/EU WEEE
- Directive 2014/30/EU EMC
- Directive 2014/35/EU Low LVD
- CE Mark: Europe
- CRoHS: China RoHS
- KC Mark: South Korea
- RCM Mark: Australia
- UKCA Mark: United Kingdom
- VCCI Mark: Japan

About Nokia

At Nokia, we create technology that helps the world act together.

As a B2B technology innovation leader, we are pioneering networks that sense, think and act by leveraging our work across mobile, fixed and cloud networks. In addition, we create value with intellectual property and long-term research, led by the award-winning Nokia Bell Labs.

With truly open architectures that seamlessly integrate into any ecosystem, our high-performance networks create new opportunities for monetization and scale. Service providers, enterprises and partners worldwide trust Nokia to deliver secure, reliable and sustainable networks today – and work with us to create the digital services and applications of the future.

© 2025 Nokia

Nokia OYJ
Karakaari 7
02610 Espoo
Finland
Tel. +358 (0) 10 44 88 000

Document code: (August) CID210990