

Nokia 7950 Extensible Routing System

Release 26

The Nokia 7950 Extensible Routing System (XRS) core routing platform delivers the scale, efficiency and versatility needed to stay ahead of demanding service requirements and evolving network environments.

Scale, efficiency and versatility are critical success factors for network operators in order to sustain profitable growth in a fiercely competitive market where the only constant is change.

Proven innovations lie at the heart of the 7950 XRS family, from its silicon to its software and its integration capabilities. The 7950 XRS allows a core network to be built with the ability to meet ever-growing capacity demands while covering the full range of capabilities to cost-effectively address IP routing, Internet peering, multiprotocol label switching (MPLS) and infrastructure service requirements on a common core platform.

The conventional wisdom is that cost-efficient scaling of core networks can only be achieved by reducing the scope of functionality and range of flexibility. However, just adding more capacity inevitably results in unwieldy, multi-tier core networks with rapidly diminishing returns and poor investment protection. Powered by FP4, Nokia's 3 Tb/s routing silicon, the 7950 XRS achieves scale and efficiency without compromising versatility. This enables network operators to rethink existing restrictions and conventions and build a capable and converged core network that can scale in a smart way, with superior returns on investments.

The 7950 XRS is deployed globally across telecommunication providers, AI and cloud providers, and mission-critical enterprise network environments.



7950 XRS family overview

The 7950 XRS family is designed to meet the needs of global, national, regional and private network operators of all sizes.

The common platform addresses the full spectrum of networking needs for public and private internet backbones and peering points, metropolitan and regional aggregation hubs as well as cloud, data center and mobile core infrastructure. This will enable network operators to deliver the immersive ultra-broadband service experiences that consumers aspire to today and will expect tomorrow.

One platform for all services

The 7950 XRS addresses the full range of core routing requirements using common hardware that runs the proven, resilient and feature-rich Service Router Operating System (SR OS).

A flexible, pay-as-you-go software licensing model allows you to build a versatile, reliable and converged core network that evolves with your needs while protecting your hardware investments.

Performance at scale, powered by FP4

A modular and extensible hardware design powered by Nokia FP4 routing silicon ensures granular and economical scaling of switching capacity and port density with deterministic forwarding performance. A single 7950 XRS-20e chassis equipped with FP4 hardware delivers up to 48 Tb/s full duplex switching capacity, and supports port densities of up to 160 400GE, 800 100GE or 4800 10GE interface ports, with flexible 10GE, 40GE, 100GE and 400GE breakout options provided by universal QSFPDD or QSFP28 ports. Equipped with six-port CFP2-DCO XRS Media Adapters (XMAAs), a single chassis supports up to 240 100G clear channel interfaces with optics.

A single 7950 XRS-20 chassis equipped with FP4 hardware delivers 32 Tb/s full duplex switching capacity, and supports up to 80 400GE, 320 100GE or 3200 10GE interface ports. See table 3 for more scaling details.

400G IP-optical integration

The Nokia 7950 XRS is ready for the 400GE era. The FP4-based QSFP56-DD and CFP2-DCO XMAAs support 400G ZR and ZR+ coherent pluggable router optics at scale for high-capacity data center interconnect, metro and regional core network applications.

A standards-based GMPLS user-network interface (UNI) enables IP-optical control plane integration, allowing the 7950 XRS to efficiently coordinate IP routing and transport requirements across administrative boundaries and to dynamically set up optical segments and end-to-end transport connections.

Cross-domain management

The 7950 XRS is managed by the Nokia Network Services Platform (NSP), supporting integrated element and network management with end-to-end orchestration of network resource provisioning and assurance operations.

Carrier SDN integration and automation

The 7950 XRS and SR OS enable multivendor software-defined networking (SDN) control integration through OpenFlow, Path Computation Element Communication Protocol (PCEP) and model-driven network element management through CLI, NETCONF and gRPC/gNMI using YANG models. Network operators can leverage the 7950 XRS in combination with the NSP to introduce scalable and integrated carrier SDN control across IP, MPLS, Ethernet and optical transport layers.

The NSP supports unified service automation and network optimization with comprehensive path computation capabilities to enable source-based routing and traffic steering with segment routing support, online traffic engineering and resource optimization, and elastic bandwidth services for dynamic cloud applications. The NSP is further assisted by Deepfield analytics to support insight-driven automation of network and flow optimization, as well as DDoS attack mitigation.




7950 XRS-20e

The Nokia 7950 XRS-20e delivers up to 48 Tb/s full duplex switching capacity in a single 19-in rack.

The XRS-20e offers 20 slots with enhanced power and cooling capacity to support 2400 Gb/s full duplex aggregate interface capacity. Fully equipped with FP4 hardware, it offers up to 800 100GE, 160 400GE or 4800 10GE interface ports with intelligent fan-in/fan-out capabilities in a single rack, with additional 10G and 40G breakout options.

The XRS-20e comes in two chassis variants: a universal variant supporting all AC and DC power options and an AC/HVDC variant. The XRS-20e is functionally compatible with the XRS-20. All hardware components except the fan trays and XRS Control Modules are common and interchangeable.

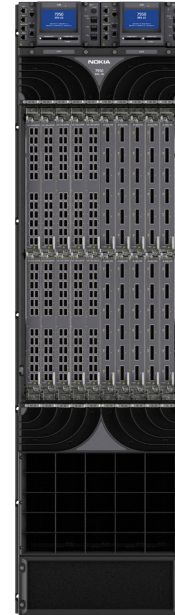

7950 XRS-20

The Nokia 7950 XRS-20 provides up to 32 Tb/s full duplex switching capacity in a single 19-in rack.

Each XRS-20 system offers 20 slots, each capable of 1600 Gb/s full duplex aggregate interface capacity. Fully equipped with FP4 hardware, it offers up to 320 100GE, 80 400GE or 3200 10GE ports in a single rack.

The 7950 XRS-20 supports a mix of FP4 and FP3-based XCMs and XMA in the same chassis by exchanging the SFM cards for FP4 variants. All other hardware components including CPM, CCM, fans and APEQs can be reused to maximize investment protection.

Common elements and attributes

The 7950 XRS core router family shares fundamental attributes that ensure consistency, operational ease of use, and investment protection for network operators.

Routing silicon

The 7950 XRS leverages Nokia's industry-leading FP4 NPU routing silicon to ensure optimal performance and scaling of a rich and complete Layer 2 and Layer 3 feature set that addresses all core deployment scenarios. The 3 Tb/s FP4 chipset is Nokia's fourth-generation NPU and provides the perfect geometry for high-density 100G and 400G interface modules, with support for 1 Terabit Ethernet (TE) line rates. It offers deterministic forwarding performance with enhanced packet intelligence and control capabilities for advanced traffic management and granular DDoS filtering policies.

These silicon innovations drive the high level of flexibility and performance needed for converged backbone and metro core deployments, including IP routing and peering, MPLS switching, VPN infrastructure services and data center interconnection applications.

Modular hardware architecture

The Nokia 7950 XRS has a modular and scalable hardware architecture with universal linecards to enable cost-efficient pay-as-you-grow system evolution with optimal investment protection.

Line card licenses add flexibility for tailoring and tuning 7950 XRS systems to customers' evolving needs. Capability-level licenses provide growth options on the number of connectors, total connector bandwidth and intelligent fan-in/fan-out aggregation mode (see Table 2 for details). Functional-level licenses provide growth options to scale services and unlock the full array of IP routing features, functions and applications with

advanced QoS capabilities through a simple license upgrade, without hardware changes or maintenance windows. This enables operators to consolidate core routing systems on a single platform, and to rapidly respond to evolving requirements with minimal impact and maximum investment protection.

Operating system

The 7950 XRS family is based on the proven SR OS, carrying forward over a decade of experience in the IP networks of more than 750 network operators worldwide. With a single common OS across the Nokia routing portfolio, network operators benefit from an extensive track record of reliability in the field and a full suite of features to enable resiliency, high availability and in-service software upgrade (ISSU).

Power and cooling efficiency

The 7950 XRS system design incorporates intelligent power management capabilities to monitor power consumption of individual components, assure power safety thresholds, and manage power-up and power-down priorities in the event of degraded power availability. Other key enhancements include clock gating techniques that dynamically reduce power to system components not in use.

Redundant, modular fan trays that are linearly modulated provide appropriate and efficient cooling with reduced noise levels.

A "pull" airflow design, in combination with impedance panels and air guides, ensures an even distribution of air to every section of the system. Hot air exhaust through the back of the chassis ensures a clean separation between the hot and cold aisles. An optional top plenum accessory is available for the 7950 XRS-20 to enable hot air exhaust at the top of the chassis for additional cooling efficiency.

Hardware overview

All common equipment components are redundant and field-replaceable to maximize system uptime.

Chassis Control Modules (CCMs)

Redundant CCMs support operator access to the Nokia 7950 XRS control and management interfaces. The CCMs are located at the top, and each CCM has an LCD touch-screen display and supports interfaces for timing, management, alarms and memory expansions.

Advanced Power Equalization Modules (APEQs)

APEQs provide power for the 7950 XRS and include built-in intelligence to monitor and communicate available power budget versus actually consumed power. The low voltage DC APEQs deliver up to 4725W each. AC APEQs take 200-240 V single phase and deliver 3,000 W each. APEQs support cost-effective modular expansion as required.

Fan trays

Fan trays provide system cooling for the 7950 XRS. Redundant fans can be controlled independently and fan speed is linearly modulated to allow for the optimal balancing of cooling, power and noise. The 7950 XRS-20 supports two stacked horizontal fan trays with 1+1 redundancy. The XRS-20e chassis variants support three side-by-side impeller fan trays with 2+1 redundancy.

Switch Fabric Modules (SFMs)

SFMs enable the line-rate connectivity between all slots of a 7950 XRS chassis. The fabric cards are N+1 redundant with active redundancy and graceful capacity degradation in case multiple SFMs fail. The FP4-based SFM2 supports both FP4 and FP3 XCMs and XMA, enabling a simple and cost-efficient upgrade path for existing FP3 configuration by simply replacing the existing FP3-SFM cards.

Control Processor Modules (CPMs)

CPMs provide the management, security and control plane processing for the Nokia 7950 XRS. Redundant CPMs operate in a hitless, stateful, failover mode, and support system upgrades from FP3 to FP4 hardware. Central processing and memory are intentionally separated from the forwarding function on the interface modules to ensure utmost system resiliency. Each CPM contains a full FP complex to protect the control plane against denial of service attacks.

Expandable Media Adapters (XMAs)

XMAs provide flexible interface options for the 7950 XRS, including high-density GE, 10GE, 40GE, 100GE and 400G interfaces. They contain an FP3 or FP4-based forwarding complex that performs typical functions such as packet lookups, traffic classification, processing and forwarding, service enablement and QoS. Each XMA also provides specific interface ports, physical media and optical functions. The broad range of interface options and slot capacity accommodates different networking roles and deployment needs while protecting 7950 XRS hardware investments (see Table 2).

XRS Control Modules (XCMs)

XMAs are equipped in an appropriate XCM. The XCMs contain a slot-level control plane subsystem and fabric interface to interconnect to the SFMs via the chassis mid-plane. The XRS-20 and 20e each use dedicated XCM variants, but share the same XMAs. The FP3-based XCM variants each deliver 800 Gb/s full duplex slot capacity to a pair of 400G XMAs. The FP4-based XCM2 variant for the XRS-20 delivers 3.2 Tb/s full duplex capacity, while the XRS-20e variant delivers 4.8 Tb/s to a pair of FP4 XMAs. The flexibility and modularity of XCMs and XMAs allow network operators to granularly configure each chassis with its desired mix of interface ports to meet the demands of growing core networks.

Technical specifications

Table 1. Technical specifications for the Nokia 7950 XRS family

	7950 XRS-20e	7950 XRS-20
System capacity (full duplex)	48 Tb/s (FP4)	32 Tb/s (FP4)
System design	Mid-plane	Mid-plane
Interface slots	20	20
Number of XMA	20 per system	20 per system
Common equipment redundancy	CPM (1+1), CCM (1+1), DC APEQ (N+1), AC APEQ (N+N), SFM (7+1), fan trays (2+1), power termination (1+1)	CPM (1+1), CCM (1+1), DC APEQ (N+1), AC APEQ (N+N), SFM (7+1), fan trays (1+1), power termination (1+1)
Hot-swappable modules	CPM, CCM, XCM, XMA, APEQ, SFM, PIM, PCM, fans	CPM, CCM, XCM, XMA, APEQ, SFM, fans
Dimensions	1 standard 19-in rack 44 RU <ul style="list-style-type: none"> • Height: 195.6 cm (77 in) • Width: 44.5 cm (17.5 in) • Depth: 106.3 cm (41.9 in) 	1 standard 19-in rack 39 RU (44 RU with top plenum) <ul style="list-style-type: none"> • Height: 173 cm (68.25 in) • Width: 44.5 cm (17.5 in) • Depth: 91 cm (36 in)
Weight* (max)	612.35 (1350 lb)	535.2 kg (1180 lb)
Power	<ul style="list-style-type: none"> • -48 V DC (12 60A/80A inputs) • 260–400 V DC (12 inputs) • 200–240 V AC (12 inputs) 	<ul style="list-style-type: none"> • -48 V DC (12 60A/80A inputs) • 260–400 V DC (12 inputs) • 200–240 V AC (12 inputs)
Cooling	Front/bottom to back	Front/bottom to top/back

*Weights and dimensions are approximate and subject to change. Refer to the appropriate installation guide for the current weights and dimensions.

Table 2. Supported XMA and licensing options for Nokia 7950 XRS-20 and XRS-20e

XMA hardware description	XMA licensing options		Maximum density per slot: 7950 XRS-20 / XRS-20e			
	Connectors	Capacity	10GBASE	40GBASE	100GBASE	400GBASE
12p QSFPDD universal XMA with intelligent fan-in/out and flexible breakout for 10, 40, 100 and 400 GBASE	8	1.6 Tb/s	80 / 80	8 / 8	16 / 16	4 / 4
	12	2.4 Tb/s	80 / 120	8 / 12	16 / 24	4 / 6
	12	4 Tb/s	80 / 120	8 / 12	16 / 40*	4 / 8*
24p QSFP28 universal XMA with flexible breakout for 10, 40 and 100 GBASE	12	1.2 Tb/s	120 / 120	12 / 12	12 / 12	-
	16	1.6 Tb/s	160 / 160	16 / 16	16 / 16	-
	24	2.4 Tb/s	160 / 240	24 / 24	16 / 24	-
6p CFP2-DCO clear channel	6	1.2 Tb/s	-	-	12* / 12	-

* With intelligent fan-in/fan-out aggregation

XMA hardware description	XMA licensing options		Maximum density per slot: 7950 XRS-20 / XRS-20e			
	Connectors	Capacity	10GBASE	40GBASE	100GBASE	400GBASE
4p 100GBASE CFP2	4	400 Gb/s	-	-	4 / 4	-
40p 10GBASE SFP+	40	400 Gb/s	40 / 40	-	-	-

Table 3. System totals per port type

Interface type	7950 XRS-20	7950 XRS-20e
400ZR/ZR+ DCO	80*	120
400GBASE	80	120/160*
100GBASE	320	480/800*
40GBASE	480	480
10GBASE	3,200	4,800

* With intelligent fan-in/fan-out aggregation

Feature and protocol support highlights¹

Feature and protocol support in the 7950 XRS includes but is not limited to the following.

IP and MPLS routing features

- IP unicast routing:
 - Intermediate System-to-Intermediate System (IS-IS)
 - Open Shortest Path First (OSPF)
 - Routing Information Protocol (RIP)
 - Multiprotocol Border Gateway Protocol (MBGP)
 - Unicast Reverse Path Forwarding (uRPF)
 - Comprehensive control plane protection features for security
 - IPv4 and IPv6 feature parity
- IP multicast routing:
 - Internet Group Management Protocol (IGMP)
 - Multicast Listener Discovery (MLD)
 - Protocol Independent Multicast (PIM)
 - Multicast Source Discovery Protocol (MSDP)
 - Bit Indexed Explicit Replication (BIER)
 - IPv4 and IPv6 feature parity

- MPLS:

- Full Label edge router (LER) and Label switch router (LSR) functionality with comprehensive SR-MPLS and MPLS-SRv6 interworking for seamless MPLS designs
- MPLS-Transport Profile (MPLS-TP)
- Label Distribution Protocol (LDP) and Resource Reservation Protocol (RSVP) for MPLS signalling and traffic engineering
- Includes point-to-point (P2P) and point-to-multipoint (P2MP) label switched paths (LSPs) with multicast LDP (MLDP), P2MP RSVP and weighted Equal-Cost Multi-Path (ECMP)

Segment routing and SDN features

- Segment Routing (SR) flexible algorithms for SR-MPLS and SRv6 (128-bit and micro-segment) data plane
 - Nokia SR OS platforms support intra-area and/or inter-area shortest path using IGP metric, TE-metric or delay, as well as traffic engineered tunnels. In addition, SR OS supports selecting a subset of links to be included or excluded for each flexible algorithm.
- Multiple instance IS-IS and OSPF SR support with shortest path tunnel, Segment Routing-Traffic

¹ Some platforms and/or hardware assemblies may have feature exclusions or exceptions

Engineering (SR-TE) LSP, flexible algorithms and static and BGP SR policy

- Implementation provides Loop Free Alternate (LFA), remote LFA and Topology-Independent LFA (TI-LFA) protection for all types of tunnels as well as end-to-end protection with primary/secondary paths for SR-TE tunnels and SR policies.
- PCEP allows the delegation of the SR-TE LSP to the Nokia NSP or a third-party PCE function.
- Programmable forwarding tables via gRPC-based routing information base (RIB) API feature and MPLS forwarding policy
- Extensive set of capabilities using ACL logic to steer routes/flows toward various target types, such as IP next-hop, SR-TE/RSVP-TE/MPLS-TP LSP and Virtual Routing and Forwarding (VRF)
 - Applicable to a wide range of routing and service contexts, such as global routing table, Virtual Private Routed Network (VPRN), Virtual Private LAN Service (VPLS) and E-PIPE service
 - Supports control interfaces such as OpenFlow, FlowSpec, CLI and NETCONF
- Multivendor SDN control integration through OpenFlow, PCEP, BGP Link-State (BGP-LS) and BGP SR policy support
- Collection of traffic statistics on an extensive set of constructs:
 - LDP
 - RSVP-TE and SR-TE LSPs
 - MPLS forwarding policies
 - SR policies
 - RIB API tunnel entries
 - Interior Gateway Protocol (IGP) SIDs

Layer 2 features

- Ethernet LAN (E-LAN): BGP-VPLS, PBB-VPLS, EVPN and PBB-EVPN
- E-Line: BGP Virtual Private Wire Service (BGP-VPWS), EVPN-VPWS, EVPN Flexible Cross Connect (FXC), PBB-EVPN E-line, and EVPN-VPWS service gateway functionality
- E-Tree: EVPN and PBB-EVPN per AC E-Tree and EVPN per PE E-Tree

- DCI: EVPN Virtual eXtensible LAN (VXLAN) to VPLS/EVPN-MPLS/EVPN-VXLAN/EVPN-SRv6 gateway functions

Layer 3 features

- IP-VPN
- Enhanced internet services
- EVPN for Layer 3 unicast and Optimized Inter-Subnet Multicast (OISM) services with Integrated Routing and Bridging (EVPN-IRB)
- Multicast VPN (MVPN), which includes inter-AS MVPN and Next Generation MVPN (NG-MVPN)
- EVPN and IP-VPN gateway interworking, including D-PATH attribute for loop protection in redundant gateways
- Seamless MPLS/SRv6 integration in the same IP-VRF for interworking or migration between MPLS and SRv6 transport technologies
- ARP/ND control plane synchronization on Layer-3 interfaces

System features

- Ethernet satellites: Port expansion through local or remote Nokia 7210 SAS-S series GE, 10GE and 100GE satellite variants, offering 24/48 x GE ports or 64 x GE/10GE ports over 10GE and 100GE uplinks
- OAM: Extensive fault and performance monitoring. OAM includes:
 - Ethernet Connectivity Fault Management (CFM) (IEEE 802.1ag, ITU-T Y.1731)
 - Ethernet in the First Mile (EFM) (IEEE 802.3ah)
 - Link Layer Discovery Protocols (LLDP) (IEEE 802.3AB-2005)
 - Bidirectional Forwarding Detection (BFD), including Seamless BFD
 - BIER
 - Cflowd
 - Two-Way Active Measurement Protocol (TWAMP and TWAMP Light/STAMP)
 - A full suite of MPLS and SR fault and performance tools
 - Service mirroring
 - Lawful intercept

- Timing:
 - ITU-T Synchronous Ethernet (SyncE)
 - IEEE 1588v2 Precision Time Protocol (PTP)
 - Network Time Protocol (NTP)
 - BITS ports (T1, E1, 2M)
 - 1PPS
- QoS:
 - Flexible intelligent packet classification
 - Ingress and egress Hierarchical QoS (H-QoS) with multitiered shaping and two-tiered, class fair hierarchical policing
 - Advanced, scalable network and service QoS
 - End-to-end consistent QoS regardless of oversubscription or congestion
- High availability:
 - Nonstop routing²
 - Nonstop services²
 - ISSU¹
 - IP: ECMP with up to 64 x 64 paths (2-level hierarchical ECMP: BGP ECMP and link/tunnel ECMP), IP FRR with LFA, BGP Edge and Core PIC
 - MPLS: LDP with ECMP and LFA/RLFA; RSVP-TE LSP with primary/standby secondary paths; BGP-LU tunnel with ECMP and Edge PIC
 - SR-MPLS: LFA/RLFA/TI-LFA, SR-TE LSP with ECMP and primary/standby secondary paths; SR policy with linear and ECMP protection modes
 - SRv6: LFA/RLFA/TI-LFA, SRv6 policy with linear and ECMP protection modes
 - PW redundancy
 - EVPN single-active and all-active multi-homing with revertive and non-revertive mode
 - Multi-chassis LAG
 - Multi-chassis PW endpoint redundancy
 - BGP multi-homing for VPLS/VPWS services

Management features

- Model-driven configuration and state management through the MD-CLI, NETCONF and gRPC/gNMI using YANG models; streaming telemetry through gRPC/gNMI subscriptions; operations through NETCONF using YANG models and gNOI.
- Enhanced automation flexibility provides personalization and automation with Python 3
- Full SNMP management support including configuration, monitoring and traps
- Comprehensive network and node management through the Nokia NSP
- Zero Touch Provisioning (ZTP) automatically downloads the image and configuration from a server via out-of-band management port or in-band interfaces

Standards support³

Environmental specifications

- Operating temperature: 5°C to 40°C (41°F to 104°F)
- Operating relative humidity: 5% to 85% non-condensing
- Operating altitude: Up to 3960 m (13,000 ft); operating temperature range de-rated above 1,829 m (6,000 ft)

Safety

- AS/NZS 62368.1
- IEC/EN 60825-1
- IEC/EN 60825-2
- IEC/EN/UL/CSA 62368-1

EMC emission

- AS/NZS CISPR 32 Class A
- BSMI CNS13438 Class A
- EN 55032 Class A
- FCC Part 15 Class A
- ICES-003 Class A
- IEC CISPR 32 Class A

² Requires redundant CPM modules

³ System design intent is according to the listed standards. Refer to the product documentation for detailed compliance status.

- IEC/EN 61000-3-2 Power Line Harmonics
- IEC/EN 61000-3-3 Voltage Fluctuations and Flicker
- IEC/EN 61000-6-4
- KS C 9832
- VCCI Class A

EMC immunity

- BT GS-7
- EN 55035
- ETSI EN 300 132-1 AC Power Supply Interface
- ETSI EN 300 132-2 DC Power Supply Interface
- ETSI EN 300 132-3-1 HVDC Power Supply Interface
- ETSI EN 300 386
- ETSI ES 201 468
- IEC CISPR 35
- IEC/EN 61000-3-2 Power Line Harmonics
- IEC/EN 61000-3-3 Voltage Fluctuations and Flicker
- IEC/EN 61000-4-2 Electrostatic Discharge
- IEC/EN 61000-4-3 Radiated, RF, EM field immunity
- IEC/EN 61000-4-4 Electrical Fast Transients
- IEC/EN 61000-4-5 Surge Immunity
- IEC/EN 61000-4-6 Immunity to Conducted Disturbances
- IEC/EN 61000-4-11 Voltage Interruptions
- IEC/EN 61000-6-2
- ITU-T K.20
- ITU-T L.1200
- KS C 9835

Environmental/NEBS

- ATIS 0600010
- ATIS-0600015
- ATIS-0600015.03
- ATIS-0600315.01 HVDC Power Supply Interface
- ATT-TP-76200
- ETSI EN 300 019-2-1 Storage Tests, Class 1.2
- ETSI EN 300 019-2-2 Transportation Tests, Class 2.3
- ETSI EN 300 019-2-3 Operational Tests, Class 3.2

- ETSI EN 300 019-2-3 Earthquake
- GR-63-CORE, Level 3
- GR-1089-CORE, Level 3
- TR No. 176002 1.1
- VZ.TPR.9205
- VZ.TPR.9305

Wireless

- ETSI EN 301 489-1
- ETSI EN 301 489-17
- KS X 3124
- KS X 3126

Directives, regional approvals and certifications

- Directive 2011/65/EU Restriction of the use of certain Hazardous Substances in Electrical and Electronic Equipment (Recast) Directive (including Commission Delegated Directive (EU) 2015/863)
- Directive 2012/19/EU Waste Electrical and Electronic Equipment (WEEE)
- Directive 2014/30/EU Electromagnetic Compatibility (EMC)
- Directive 2014/35/EU Low Voltage Directive (LVD)
- Directive 2014/53/EU Radio Equipment Directive (RED)
- BSMI Mark - Taiwan
- CE Mark - Common Europe
- CRoHS - China RoHS
- KC Mark - South Korea
- NEBS Level 3
- RCM Mark - Australia
- UKCA Mark - United Kingdom
- VCCI Mark - Japan

MEF certifications

For a list of Nokia CE 1.0-, CE 2.0- and CE 3.0-certified products, refer to the [MEF certification registry](#)

Refer to the 7950 XRS product and release documentation for system details on dimensions, weights, hardware, safety standards, compliance agency certifications and protocol support.



About Nokia

At Nokia, we create technology that helps the world act together.

As a B2B technology innovation leader, we are pioneering networks that sense, think and act by leveraging our work across mobile, fixed and cloud networks. In addition, we create value with intellectual property and long-term research, led by the award-winning Nokia Bell Labs.

With truly open architectures that seamlessly integrate into any ecosystem, our high-performance networks create new opportunities for monetization and scale. Service providers, enterprises and partners worldwide trust Nokia to deliver secure, reliable and sustainable networks today – and work with us to create the digital services and applications of the future.

Nokia operates a policy of ongoing development and has made all reasonable efforts to ensure that the content of this document is adequate and free of material errors and omissions. Nokia assumes no responsibility for any inaccuracies in this document and reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

© 2026 Nokia

Nokia Oyj
Karakaari 7
02610 Espoo
Finland
Tel. +358 (0) 10 44 88 000

Document code: (March) CID205346